


TECHNICAL SPECIFICATIONS

Cod.	Campo mm	Accuratezza Precision mm	Prolunga Prolongación mm	L1 mm	A mm
BB271125	100 ÷ 125	± 0,005	150	145	0,5
BB271150	125 ÷ 150				
BB271175	150 ÷ 175				
BB271200	175 ÷ 200				
BB271225	200 ÷ 225	± 0,010	150	145	0,5
BB271250	225 ÷ 250				
BB271275	250 ÷ 275				
BB271300	275 ÷ 300				

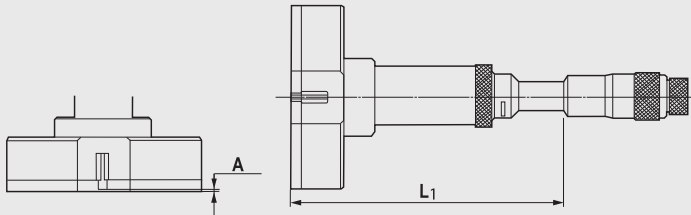

Micrometro per interni a tre punte.

Risoluzione 0,005 mm.

Tamburo graduato con frizione sensibile, esecuzione cromata opaca.

Micrómetro para interiores de tres brocas.

Resolución 0,005 mm.

Tambor graduado con embrague sensible, ejecución cromada mate.

Anelli di azzeramento disponibili a pag. F.14

Anillos para la puesta a cero disponibles en la pág. F.14



TECHNICAL SPECIFICATIONS

Cod.	Campo mm	Prolunga Prolongación Ø mm	Composizione Composizione mm
BB25063	50 ÷ 63	-	Solo testina micrometrica Solo cabeza micrométrica
BB250150	50 ÷ 150	16	13 - 25 - 50
BB250300	50 ÷ 300		13 - 25 - 50 (2pz / 2 pcs) - 100 13 - 25 - 50 (2 uds. / 2 pcs.) - 100
BB250600	50 ÷ 600		13 - 25 - 50 - 100 - 150 - 200
BB2501000	50 ÷ 1000		13 - 25 - 50 - 100 (2pz / 2 pcs) 150 - 200 13 - 25 - 50 - 100 (2 uds. / 2 pcs.) 150 - 200
BB2501500	50 ÷ 1500	23	13 - 25 - 50 - 100 (2 pz / 2 pcs) 150 - 200 (2 pz / 2 pcs) 300 (2 pz / 2 pcs) 13 - 25 - 50 - 100 (2 uds. / 2 pcs.) 150 - 200 (2 uds. / 2 pcs.) 300 (2 uds. / 2 pcs.)
BB2502000	150 ÷ 2000		25 - 50 (2 pz / 2 pcs) 100 - 200 (2 pz / 2 pcs) - 400 (3 pz / 3 pcs) 25 - 50 (2 uds. / 2 pcs.) 100 - 200 (2 uds. / 2 pcs.) - 400 (3 uds. / 3 pcs.)
BB2503000	1000 ÷ 3000	28	50 - 100 (2 pz. / 2 pcs) 200 - 500 - 1000 (2 pz / 2 pcs) 50 - 100 (2 uds. / 2 pcs.) 200 - 500 - 1000 (2 uds. / 2 pcs.)

Disponibili prolunghe fino a 1000 mm. / Disponibles extensiones de hasta 1000 mm.

Micrometro per interni con prolunghe componibili.

Risoluzione 0,01 mm.

Superfici di contatto in metallo duro.

Micrómetro para interiores con extensiones montables.

Resolución 0,01 mm.

Superficies de contacto de metal duro.

