




- Lo speciale profilo conico garantisce una forte presa in fase di disserraggio

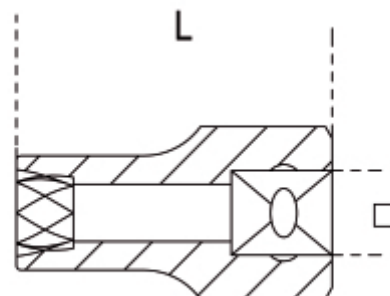

Art.	art.	Ø mm	□	L mm	g
014280008	1428	8	3/8	36	36
014280010	1428	10	3/8	36	39
014280011	1428	11	3/8	36	45
014280012	1428	12	3/8	36	56
014280013	1428	13	3/8	36	58
014280014	1428	14	3/8	36	62
014280015	1428	15	1/2	38	67
014280016	1428	16	1/2	38	75
014280017	1428	17	1/2	38	74
014280018	1428	18	1/2	38	111
014280019	1428	19	1/2	38	109
014280020		20	1/2	38	111
014280021		21	1/2	38	115
014280022		22	1/2	38	118
014280024		24	1/2	38	119
014280027		27	1/2	38	120