


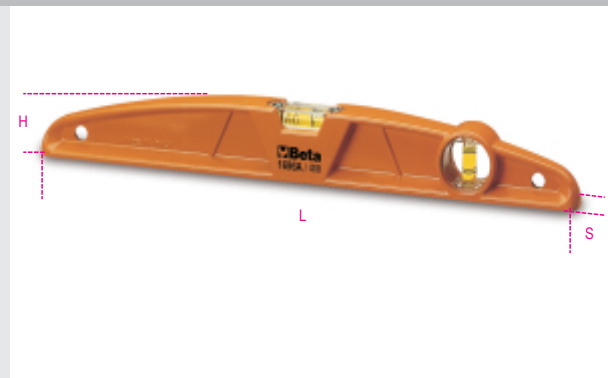

1696A**livelle in alluminio pressofuso con 1 base rettificata a 2 file infrangibili**

- Precisione 1 mm/m
- Fiala orizzontale regolabile


g

	art.	L mm	H mm	S mm	 g
016960103	1696A	300	43	23	285
016960104	1696A	400	43	23	340
016960105	1696A	500	43	23	430
016960106	1696A	600	43	23	500
016960108	1696A	800	43	23	600
016960110	1696A	1000	43	23	800