


8153

brache per sollevamento 2t verde nastro piatto a due strati, asole rinforzate, poliestere alta tenacità (PES)

CE

UNI EN 1492-1

| art. | art. | L m | | |
|-----------|-------------|--------|----|---|
| 081530010 | 8153 1-T2 | 1 | 60 | 2 |
| 081530015 | 8153 1,5-T2 | 1,5 | 60 | 2 |
| 081530020 | 8153 2-T2 | 2 | 60 | 2 |
| 081530025 | 8153 2,5-T2 | 2,5 | 60 | 2 |
| 081530035 | 8153 3,5-T2 | 3,5 | 60 | 2 |
| 081530030 | 8153 3-T2 | 3 | 60 | 2 |
| 081530040 | 8153 4-T2 | 4 | 60 | 2 |
| 081530050 | 8153 5-T2 | 5 | 60 | 2 |
| 081530060 | 8153 6-T2 | 6 | 60 | 2 |
| 081530080 | 8153 8-T2 | 8 | 60 | 2 |
| 081530100 | 8153 10-T2 | 10 | 60 | 2 |

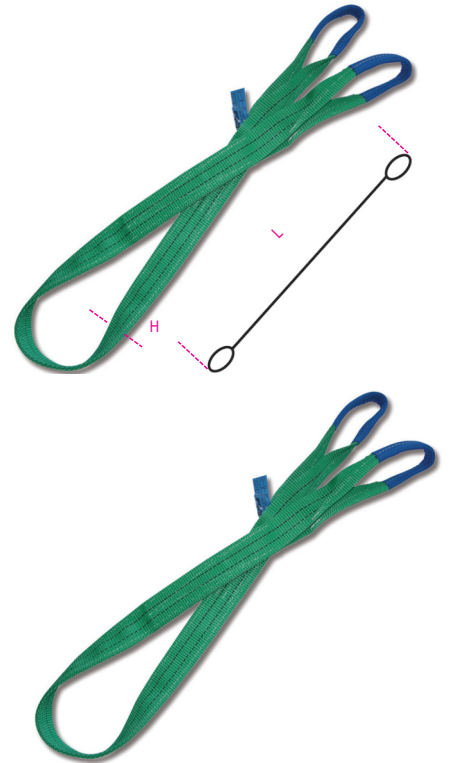

| | | | | $\beta=0^\circ+45^\circ$ | $\beta=45^\circ+60^\circ$ |
|-----|------|-------|------|--------------------------|---------------------------|
| 30 | 1 t | 0,8 t | 2 t | 1,4 t | 1 t |
| 60 | 2 t | 1,6 t | 4 t | 2,8 t | 2 t |
| 90 | 3 t | 2,4 t | 6 t | 4,2 t | 3 t |
| 120 | 4 t | 3,2 t | 8 t | 5,6 t | 4 t |
| 150 | 5 t | 4,0 t | 10 t | 7,0 t | 5 t |
| 180 | 6 t | 4,8 t | 12 t | 8,4 t | 6 t |
| 240 | 8 t | 6,4 t | 16 t | 11,2 t | 8 t |
| 300 | 10 t | 8,0 t | 20 t | 14,0 t | 10 t |