




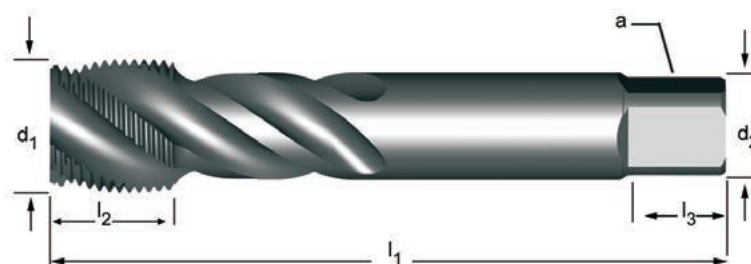



E789 • G(BSP) Maschi a macchina Scanalature elicoidali 45°

E789 • 1.1 1.2 1.3 1.4 1.5 3.1 3.2 3.3 3.4 7.1 7.2 7.3 7.4

E789 **G** **DIN 5156** Normal  **2.5XD** **HSS** **C 2-3**  **λ45°**   



G(BSP)	TPI	d ₁ nom mm	l ₁ mm	l ₂ mm	d ₂ ∅ mm	∠ a mm	l ₃ mm	z		E789
1/8	28	9.728	90	13	7.0	5.5	8	3	8.8	E7891/8
1/4	19	13.157	100	15	11.0	9.0	12	3	11.8	E7891/4
3/8	19	16.662	100	15	12.0	9.0	12	4	15.25	E7893/8
1/2	14	20.955	125	18	16.0	12.0	15	4	19.0	E7891/2
3/4	14	26.441	140	20	20.0	16.0	19	4	24.5	E7893/4
1"	11	33.249	160	22	25.0	20.0	23	4	30.75	E7891