



E783 • M Maschi a macchina Scanalature elicoidali 45°

E783 • 1.1 1.2 1.3 1.4 1.5 3.1 3.2 3.3 3.4 7.1 7.2 7.3 7.4

E783

- M
- DIN 371 ≤ 10
376 ≥ 12
- 6H
- 
- 2.5XD
- HSS
- C 2-3
-  λ 45°
- 
- 
- L700
14

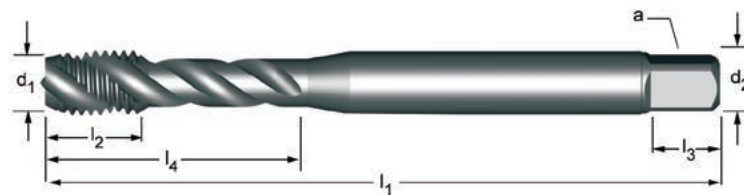

| M | P mm | l ₁ mm | l ₂ mm | d ₂ ∅ mm | □ a mm | l ₃ mm | z |  | l ₄ mm | E783 |
|----|---------|----------------------|----------------------|---------------------------|--------------|----------------------|---|---|----------------------|---------|
| 3 | 0.50 | 56 | 5 | 3.5 | 2.7 | 6 | 3 | 2.5 | 18 | E783M3 |
| 4 | 0.70 | 63 | 7 | 4.5 | 3.4 | 6 | 3 | 3.3 | 21 | E783M4 |
| 5 | 0.80 | 70 | 8 | 6.0 | 4.9 | 8 | 3 | 4.2 | 25 | E783M5 |
| 6 | 1.00 | 80 | 10 | 6.0 | 4.9 | 8 | 3 | 5.0 | 30 | E783M6 |
| 8 | 1.25 | 90 | 13 | 8.0 | 6.2 | 9 | 3 | 6.8 | 35 | E783M8 |
| 10 | 1.50 | 100 | 15 | 10.0 | 8.0 | 11 | 4 | 8.5 | 39 | E783M10 |
| 12 | 1.75 | 110 | 18 | 9.0 | 7.0 | 10 | 4 | 10.3 | - | E783M12 |
| 16 | 2.00 | 110 | 20 | 12.0 | 9.0 | 12 | 4 | 14.0 | - | E783M16 |
| 20 | 2.50 | 140 | 25 | 16.0 | 12.0 | 15 | 4 | 17.5 | - | E783M20 |