


- ## T200
- M Maschi a macchina Scanalature diritte
  - M Maschinen-Gewindebohrer, geradegenutet
  - M Machinetap met rechte spaangroeven
  - M Tarauds machine Goujures droites

- ## T201
- M Maschio a elica diritta, passaggio interno refrigerante
  - M Maschinen-Gewindebohrer, geradegenutet, Innenkühlung
  - M Machinetap met rechte spaangroeven, interne koeling
  - M Tarauds machine goujures droites, arrosage interne

- ## T210
- M Maschi a macchina Scanalature diritte
  - M Maschinen-Gewindebohrer, geradegenutet
  - M Machinetap met rechte spaangroeven
  - M Tarauds machine Goujures droites

T200	▪ 1.7								
	• 1.8	3.1	3.2	6.4	7.4	8.2	8.3	10.1	
T201	▪ 3.1	3.2	7.4	10.1					
	• 3.3	3.4	6.4	7.3	8.2	8.3			
T210	▪ 1.8								
	• 1.7								

T200	M	DIN 371	6H		2XD	HM	C 2-3			TiCN	
T201	M	DIN 371<sup>1</sup>10<sup>10</sup> 376>12	6HX		2.5XD	HM	C 2-3			Super B	
T210	M	DIN 371	6HX		2XD	HM	C 2-3			TiCN	

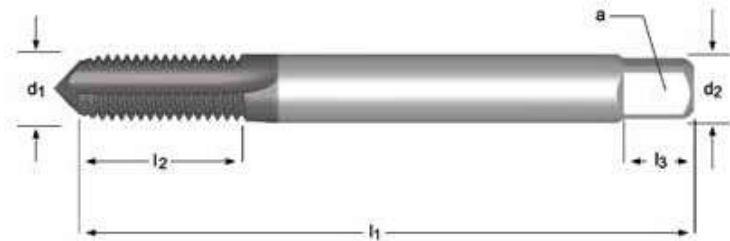

M	P mm	l <sub>1</sub> mm	l <sub>2</sub> mm	d <sub>2</sub> Ø mm	□ a mm	l <sub>3</sub> mm	z		l <sub>4</sub> mm	T200	T201	T210
3	0.50	56	10	3.5	2.7	6	3	2.6	-	T200M3		
3	0.50	56	8	3.5	2.7	6	4	2.6				T210M3
4	0.70	63	11	4.5	3.4	6	5	3.4				T210M4
4	0.70	63	13	4.5	3.4	6	3	3.4	-	T200M4		
5	0.80	70	13.5	6.0	4.9	8	5	4.3				T210M5
5	0.80	70	16	6.0	4.9	8	3	4.3	-	T200M5		
5	0.80	70	16	6.0	4.9	8	4	4.3	-		T201M5	
6	1.00	80	16.5	6.0	4.9	8	5	5.1				T210M6
6	1.00	80	19	6.0	4.9	8	3	5.1	30	T200M6		
6	1.00	80	19	6.0	4.9	8	4	5.1	30		T201M6	
8	1.25	90	21.5	8.0	6.2	9	5	6.9				T210M8
8	1.25	90	22	8.0	6.2	9	3	6.9	35	T200M8		