


- ## T200
- M Maschi a macchina Scanalature diritte
 - M Maschinen-Gewindebohrer, geradegenutet
 - M Machinetap met rechte spaangroeven
 - M Tarauds machine Goujures droites

- ## T201
- M Maschio a elica diritta, passaggio interno refrigerante
 - M Maschinen-Gewindebohrer, geradegenutet, Innenkühlung
 - M Machinetap met rechte spaangroeven, interne koeling
 - M Tarauds machine goujures droites, arrosage interne


- ## T210
- M Maschi a macchina Scanalature diritte
 - M Maschinen-Gewindebohrer, geradegenutet
 - M Machinetap met rechte spaangroeven
 - M Tarauds machine Goujures droites

T200	▪	1.7							
	•	1.8	3.1	3.2	6.4	7.4	8.2	8.3	10.1
T201	▪	3.1	3.2	7.4	10.1				
	•	3.3	3.4	6.4	7.3	8.2	8.3		
T210	▪	1.8							
	•	1.7							

T200	M	DIN 371	6H		2XD	HM	C 2-3			TiCN	
T201	M	DIN 371¹10¹⁰ 376>12	6HX		2.5XD	HM	C 2-3			Super B	
T210	M	DIN 371	6HX		2XD	HM	C 2-3			TiCN	

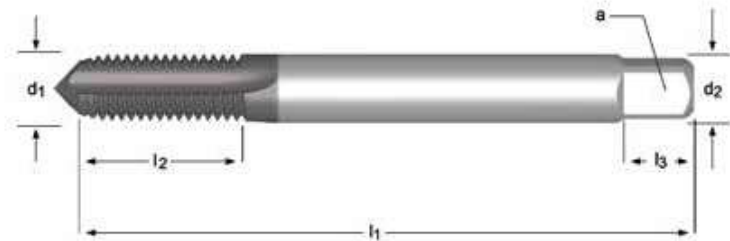

M	P mm	l ₁ mm	l ₂ mm	d ₂ Ø mm	□ a mm	l ₃ mm	z		l ₄ mm	T200	T201	T210
3	0.50	56	10	3.5	2.7	6	3	2.6	-	T200M3		
3	0.50	56	8	3.5	2.7	6	4	2.6				T210M3
4	0.70	63	11	4.5	3.4	6	5	3.4				T210M4
4	0.70	63	13	4.5	3.4	6	3	3.4	-	T200M4		
5	0.80	70	13.5	6.0	4.9	8	5	4.3				T210M5
5	0.80	70	16	6.0	4.9	8	3	4.3	-	T200M5		
5	0.80	70	16	6.0	4.9	8	4	4.3	-		T201M5	
6	1.00	80	16.5	6.0	4.9	8	5	5.1				T210M6
6	1.00	80	19	6.0	4.9	8	3	5.1	30	T200M6		
6	1.00	80	19	6.0	4.9	8	4	5.1	30		T201M6	
8	1.25	90	21.5	8.0	6.2	9	5	6.9				T210M8
8	1.25	90	22	8.0	6.2	9	3	6.9	35	T200M8		

M	P mm	l ₁ mm	l ₂ mm	d ₂ ∅ mm	∇ a mm	l ₃ mm	z		l ₄ mm	T200	T201	T210
8	1.25	90	22	8.0	6.2	9	4	6.9	35		T201M8	
10	1.50	100	24	10.0	8.0	11	3	8.7	39	T200M10		
10	1.50	100	24	10.0	8.0	11	4	8.7	39		T201M10	
10	1.50	100	27	10.0	8.0	11	5	8.7				T210M10
12	1.75	110	23	9.0	7.0	10	3	10.4	-	T200M12		
12	1.75	110	23	9.0	7.0	10	4	10.4	-		T201M12	
12	1.75	110	32	12.0	9.0	12	6	10.4				T210M12
16	2.00	110	25	12.0	9.0	12	4	14.25	-		T201M16	