


- ## T205
- M Maschi a macchina Scanalature elicoidali 15°
  - M Maschinen-Gewindebohrer, rechtsgedrallte Nuten 15°
  - M Machinetap met gespiraliseerde spaangroeven 15°
  - M Tarauds machine goujures hélicoïdales 15°

- ## T206
- M Maschi a macchina Scanalature elicoidali 15°, passaggio interno refrigerante
  - M Maschinen-Gewindebohrer, rechtsgedrallte Nuten 15°, Innenkühlung
  - M Machinetap met gespiraliseerde spaangroeven 15°, interne koeling
  - M Tarauds machine goujures hélicoïdales 15°, arrosage interne

T205; T206	▪	3.3	3.4	7.3	7.4
	•	3.1	3.2	8.2	8.3

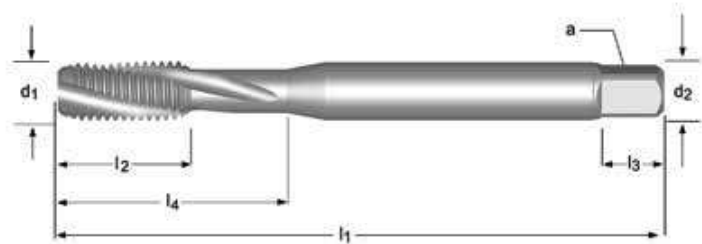

M	P mm	l <sub>1</sub> mm	l <sub>2</sub> mm	d <sub>2</sub> Ø mm	□ a mm	l <sub>3</sub> mm	z		l <sub>4</sub> mm	T205	T206
3	0.50	56	10	3.5	2.7	6	3	2.6	-	T205M3	
4	0.70	63	13	4.5	3.4	6	3	3.4	-	T205M4	
5	0.80	70	16	6.0	4.9	8	3	4.3	-	T205M5	T206M5
6	1.00	80	19	6.0	4.9	8	3	5.1	30	T205M6	T206M6
8	1.25	90	22	8.0	6.2	9	3	6.9	35	T205M8	T206M8
10	1.50	100	24	10.0	8.0	11	3	8.7	39	T205M10	T206M10
12	1.75	110	23	9.0	7.0	10	3	10.4	-	T205M12	T206M12