
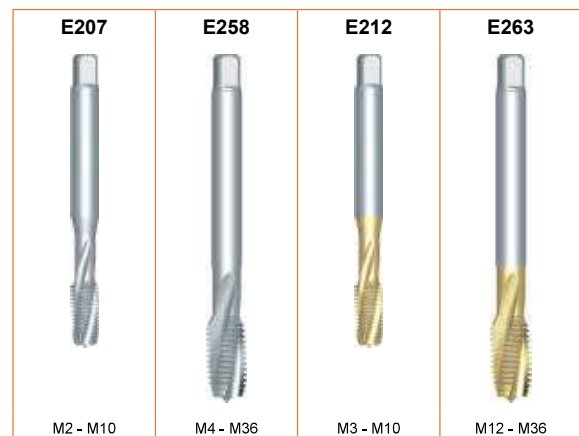


- E207** • M Maschi a macchina Scanalature elicoidali 15° Fomito in HSS-E fino a nuovo stoc
- E258** • M Maschinen-Gewindebohrer, rechtsgedrallte Nuten 15° Lieferung in HSS-E bis neuer Lagerbestand verfügbar ist
- E212** • M Machinetap met gespiraliseerde spaangroeven 15° Geleverd in HSS-E tot de nieuwe voorraad beschikbaar is
- E263** • M Tarauds machine goujures hélicoïdales 15° Fourni en HSS-E jusqu'à ce que le nouveau stock soit disponible

<b>E207; E258</b>	▪ 1.3 1.4
	• 1.2 1.5 7.2 7.3
<b>E212; E263</b>	▪ 1.3 1.4
	• 1.1 1.2 1.5 4.2 4.3 7.2 7.3

<b>E207</b>	M	DIN 371	6H		1.5XD	HSS-E PM	C 2-3		$\lambda 15^\circ$			
<b>E258</b>	M	DIN 376	6H		1.5XD	HSS-E PM	C 2-3		$\lambda 15^\circ$			
<b>E212</b>	M	DIN 371	6H		1.5XD	HSS-E PM	C 2-3		$\lambda 15^\circ$		TiN	
<b>E263</b>	M	DIN 376	6H		1.5XD	HSS-E PM	C 2-3		$\lambda 15^\circ$		TiN	

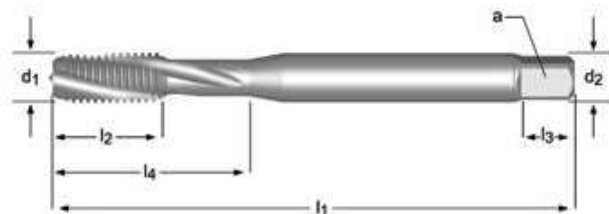

M	P mm	l <sub>1</sub> mm	l <sub>2</sub> mm	d <sub>2</sub> ∅ mm	∅ a mm	l <sub>3</sub> mm	z		l <sub>4</sub> mm	E207	E258	E212	E263
2	0.40	45	4	2.8	2.1	5	3	1.6	9	E207M2			
2.5	0.45	50	4	2.8	2.1	5	3	2.05	12.5	E207M2.5			
3	0.50	56	9	3.5	2.7	6	3	2.5	18	E207M3		E212M3	
4	0.70	63	12	2.8	2.1	5	3	3.3			E258M4	E212M4	
4	0.70	63	12	4.5	3.4	6	3	3.3	21	E207M4			
5	0.80	70	13	3.5	2.7	6	3	4.2			E258M5		
5	0.80	70	13	6.0	4.9	8	3	4.2	25	E207M5		E212M5	
6	1.00	80	15	4.5	3.4	6	3	5.0			E258M6		
6	1.00	80	15	6.0	4.9	8	3	5	30	E207M6		E212M6	
8	1.25	90	18	6.0	4.9	8	3	6.8			E258M8		
8	1.25	90	18	8.0	6.2	9	3	6.8	35	E207M8		E212M8	
10	1.50	100	20	10.0	8.0	11	3	8.5	39	E207M10		E212M10	
10	1.50	100	20	7.0	5.5	8	3	8.5			E258M10		
12	1.75	110	23	9.0	7.0	10	3	10.3			E258M12		E263M12
14	2.00	110	25	11.0	9.0	12	3	12.0			E258M14		E263M14
16	2.00	110	25	12.0	9.0	12	3	14.0			E258M16		E263M16
18	2.50	125	30	14.0	11.0	14	3	15.5			E258M18		E263M18
20	2.50	140	30	16.0	12.0	15	3	17.5			E258M20		E263M20