

E605

- M Maschi a macchina, extra lungo Scanalature elicoidali 40°
- M Maschinen-Gewindebohrer, extra lang, rechtsgedrallte Nuten 40°
- M Machinetap, extra lang met gesignaliseerde spaangroeven 40°
- M Tarauds machine, Extra Long goujures hélicoïdales 40°

Fornito in HSS-E fino a nuovo stoc

Lieferung in HSS-E bis neuer Lagerbestand verfügbar ist

Geleverd in HSS-E tot de nieuwe voorraad beschikbaar is

Fourni en HSS-E jusqu'à ce que le nouveau stock soit disponible

E605 • 1.2 1.3 1.4 1.5 2.1 2.2 2.3 5.2 7.1 7.2 7.3 7.4

E605

M

ISO
2283

6H




2XD

HSS-E
PM

C
2-3



λ40°

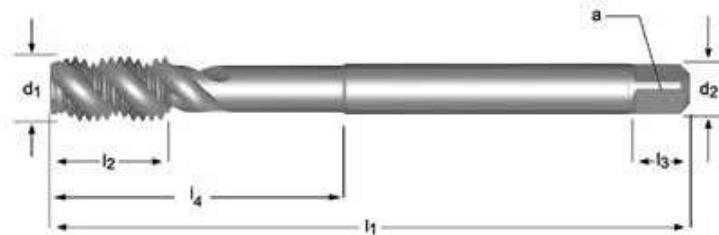

E605



M3 - M20

M	P mm	l ₁ mm	l ₂ mm	d ₂ ∅ mm	∠ a mm	l ₃ mm	z		l ₄ mm	E605
3	0.50	66	9	3.15	2.50	5	2	2.5	21	E605M3
4	0.70	73	9	4.00	3.15	6	2	3.3	22	E605M4
5	0.80	79	12	5.00	4.00	7	3	4.2	26	E605M5
6	1.00	89	12	6.30	5.00	8	3	5	29	E605M6
8	1.25	97	12	6.30	5.00	8	3	6.8	-	E605M8
10	1.50	108	14	8.00	6.30	9	3	8.5	-	E605M10
12	1.75	119	23	9.00	7.10	10	3	10.3	-	E605M12
14	2.00	127	25	11.20	9.00	12	3	12	-	E605M14
16	2.00	137	25	12.50	10.00	13	3	14	-	E605M16
20	2.50	149	30	14.00	11.20	14	3	17.5	-	E605M20