

- EX20**
- UNC Maschi a macchina Scanalature elicoidali 45°
 - UNC Maschinen-Gewindebohrer, rechtsgedrallte Nuten 45°
- EX21**
- UNC Machinetap met gespiraliseerde spaangroeven 45°
 - UNC Tarauds machine goujures hélicoïdales 45°

Fornito in HSS-E fino a nuovo stoc
 Lieferung in HSS-E bis neuer Lagerbestand verfügbar ist
 Geleverd in HSS-E tot de nieuwe voorraad beschikbaar is
 Fourni en HSS-E jusqu'à ce que le nouveau stock soit disponible


EX20 ■ 1.1 1.2 1.3 1.4 1.5 7.1 7.2 7.3 7.4

• 4.1 4.2 5.1 5.2

EX21 ■ 1.1 1.2 1.3 1.4 1.5 2.1 2.2

• 2.3

EX20	UNC	DIN 2184-1	2B		2.5XD	HSS-E PM	C 2-3	$\lambda 45^\circ$			
EX21	UNC	DIN 2184-1	2B		2.5XD	HSS-E PM	C 2-3	$\lambda 45^\circ$		ST	

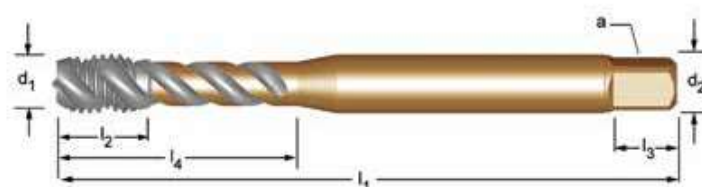

UNC	TPI	d ₁ nom mm	l ₁ mm	l ₂ mm	d ₂ Ø mm	∠ a mm	l ₃ mm	z		l ₄ mm	EX20	EX21
4	40	2.845	56	6	3.5	2.7	6	3	2.35	18	EX204-40	EX214-40
5	40	3.175	56	6	3.5	2.7	6	3	2.65	18	EX205-40	EX215-40
6	32	3.505	56	7	4.0	3.0	6	3	2.85	20	EX206-32	EX216-32
8	32	4.166	63	7	4.5	3.4	8	3	3.5	21	EX208-32	EX218-32
10	24	4.826	70	8	6.0	4.9	8	3	3.9	25	EX210-24	EX2110-24
12	24	5.486	80	10	6.0	4.9	8	3	4.5	30	EX212-24	EX2112-24
1/4	20	6.350	80	10	7.0	5.5	8	3	5.1	30	EX201/4	EX211/4
5/16	18	7.938	90	12	8.0	6.2	9	3	6.6	35	EX205/16	EX215/16
3/8	16	9.525	100	15	10.0	8.0	11	3	8.0	39	EX203/8	EX213/8
7/16	14	11.112	100	15	8.0	6.2	9	3	9.4	-	EX207/16	EX217/16
1/2	13	12.700	110	18	9.0	7.0	10	3	10.8	-	EX201/2	EX211/2
5/8	11	15.875	110	20	12.0	9.0	12	4	13.5	-	EX205/8	EX215/8
3/4	10	19.050	125	25	14.0	11.0	14	4	16.5	-	EX203/4	EX213/4
7/8	9	22.225	140	25	18.0	14.5	17	4	19.5	-	EX207/8	EX217/8
1"	8	25.400	160	30	18.0	14.5	17	4	22.25	-	EX201	EX211