


- EX30**
- UNF Maschi a macchina Scanalature elicoidali 45°
 - UNF Maschinen-Gewindebohrer, rechtsgedrallte Nuten 45°
- EX31**
- UNF Machinetap met gespiraliseerde spaangroeven 45°
 - UNF Tarauds machine goujures hélicoïdales 45°

Fornito in HSS-E fino a nuovo stoc
 Lieferung in HSS-E bis neuer Lagerbestand verfügbar ist
 Geleverd in HSS-E tot de nieuwe voorraad beschikbaar is
 Fourni en HSS-E jusqu'à ce que le nouveau stock soit disponible

EX30	▪	1.1	1.2	1.3	1.4	1.5	7.1	7.2	7.3	7.4
	•	4.1	4.2	5.1	5.2					
EX31	▪	1.1	1.2	1.3	1.4	1.5	2.1	2.2		
	•	2.3								

EX30	UNF	DIN 2184-1	2B		2.5XD	HSS-E PM	C 2-3	$\lambda 45^\circ$			
EX31	UNF	DIN 2184-1	2B		2.5XD	HSS-E PM	C 2-3	$\lambda 45^\circ$			

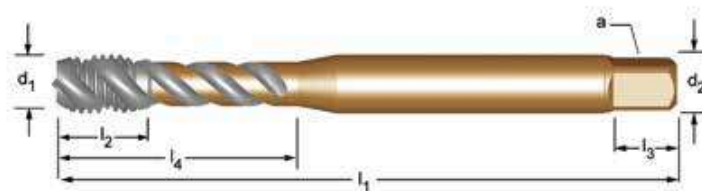

UNF	TPI	d ₁ nom mm	l ₁ mm	l ₂ mm	d ₂ Ø mm	∠ a mm	l ₃ mm	z		l ₄ mm	EX30	EX31
8	36	4.166	63	7	4.5	3.4	8	3	3.5	21	EX308-36	EX318-36
10	32	4.826	70	8	6.0	4.9	8	3	4.1	25	EX310-32	EX3110-32
1/4	28	6.350	80	10	7.0	5.5	8	3	5.5	30	EX301/4	EX311/4
5/16	24	7.938	90	12	8.0	6.2	9	3	6.9	35	EX305/16	EX315/16
3/8	24	9.525	100	15	10.0	8.0	11	3	8.5	39	EX303/8	EX313/8
7/16	20	11.112	100	15	8.0	6.2	9	3	9.9	-	EX307/16	EX317/16
1/2	20	12.700	110	18	9.0	7.0	10	3	11.5	-	EX301/2	EX311/2
5/8	18	15.875	110	20	12.0	9.0	12	4	14.5	-	EX305/8	EX315/8
3/4	16	19.050	125	25	14.0	11.0	14	4	17.5	-	EX303/4	EX313/4
7/8	14	22.225	140	25	18.0	14.5	17	4	20.4	-	EX307/8	EX317/8
1"	12	25.400	160	30	18.0	14.5	17	4	23.25	-	EX301	EX311