


E533

- BSW Maschi a macchina Scanalature elicoidali 40°
- BSW Maschinen-Gewindebohrer, rechtsgedrallte Nuten 40°
- BSW Machinetap met gespiraliseerde spaangroeven 40°
- BSW Tarauds machine goujures hélicoïdales 40°

E533	▪	1.2	1.3	1.4	2.1	2.2	2.3
	•	1.5	5.2	7.1	7.2	7.3	7.4

E533 **BSW** **ISO 529** Medium **2XD** **HSS** **C 2-3** $\lambda 40^\circ$

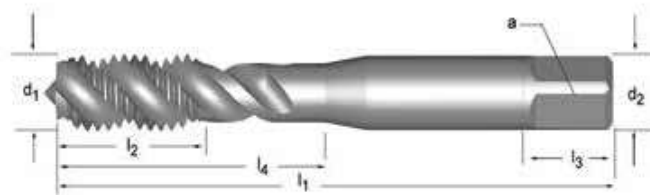

BSW	TPI	d ₁ nom mm	l ₁ mm	l ₂ mm	d ₂ Ø mm	a mm	z		l ₄ mm	E533	
1/8	40	3.175	48	12.5	3.15	2.50	3	↔	2.55	12.5	E5331/8 ³⁾
1/8	40	3.175	48	12.5	3.15	2.50	3	↔	2.55	12.5	E5331/8BLUE
3/16	24	4.763	58	11	5.00	4.00	3	↔	3.7	20	E5333/16 ³⁾
3/16	24	4.763	58	11	5.00	4.00	3	↔	3.7	20	E5333/16BLUE
1/4	20	6.350	66	13	6.30	5.00	3	↔	5.1	26	E5331/4 ³⁾
1/4	20	6.350	66	13	6.30	5.00	3	↔	5.1	26	E5331/4BLUE
5/16	18	7.938	72	16	8.00	6.30	3	↔	6.5	31	E5335/16 ³⁾
5/16	18	7.938	72	16	8.00	6.30	3	↔	6.5	31	E5335/16BLUE
3/8	16	9.525	80	18	10.00	8.00	3	↔	7.9	34	E5333/8 ³⁾
3/8	16	9.525	80	18	10.00	8.00	3	↔	7.9	34	E5333/8BLUE
1/2	12	12.700	89	22	9.00	7.10	3	↔	10.5	-	E5331/2 ³⁾
1/2	12	12.700	89	22	9.00	7.10	3	↔	10.5	-	E5331/2BLUE
5/8	11	15.875	102	24	12.50	10.00	3	↔	13.5	-	E5335/8 ³⁾
5/8	11	15.875	102	24	12.50	10.00	3	↔	13.5	-	E5335/8BLUE
3/4	10	19.050	112	29	14.00	11.20	3	↔	16.5	-	E5333/4 ³⁾
3/4	10	19.050	112	29	14.00	11.20	3	↔	16.5	-	E5333/4BLUE

³⁾ Senza / Blank / Blank / Brillant