



E282

- G(BSP) Maschi a macchina Scanalature diritte
- G(BSP) Maschinen-Gewindebohrer, geradegenutet
- G(BSP) Machinetap met rechte spaangroeven
- G(BSP) Tarauds machine Goujures droites

Fornito in HSS-E fino a nuovo stoc
 Lieferung in HSS-E bis neuer Lagerbestand verfügbar ist
 Geleverd in HSS-E tot de nieuwe voorraad beschikbaar is
 Fourni en HSS-E jusqu'à ce que le nouveau stock soit disponible

E282 • 1.1 1.2 1.3 1.4 1.5 3.1 3.2 3.3 6.2 6.3 7.2 7.3 8.2

E282 **G** **DIN 5156** Normal 1.5XD **HSS-E PM** **C 2-3**

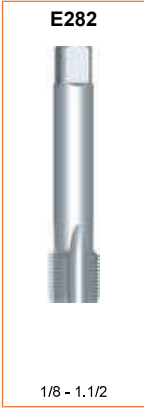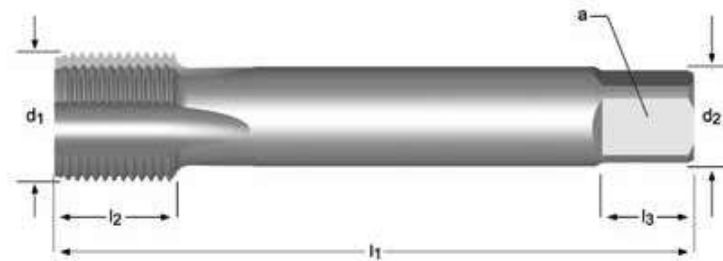

G(BSP)	TPI	d ₁ nom mm	l ₁ mm	l ₂ mm	d ₂ Ø mm	∠ a mm	l ₃ mm	z		E282
1/8	28	9.73	90	20	7.0	5.5	8	3	8.8	E2821/8
1/4	19	13.16	100	21	11.0	9.0	12	4	11.8	E2821/4
3/8	19	16.66	100	21	12.0	9.0	12	4	15.25	E2823/8
1/2	14	20.96	125	24	16.0	12.0	15	4	19.0	E2821/2
3/4	14	26.44	140	28	20.0	16.0	19	4	24.5	E2823/4
1"	11	33.25	160	30	25.0	20.0	23	4	30.75	E2821
1.1/4	11	41.91	170	30	32.0	24.0	27	4	39.5	E2821.1/4 ¹⁾
1.1/2	11	47.80	190	32	36.0	29.0	32	6	45.0	E2821.1/2 ¹⁾