
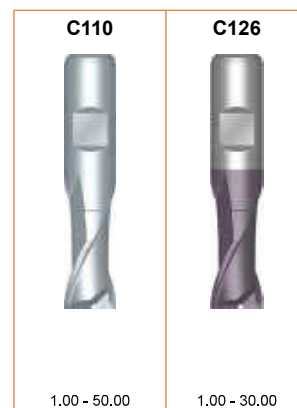


- C110** • Frese per cave
• Langlochfräser
- C126** • Spiebaanfrees
• Fraises à rainurer

C110	▪	1.1	1.2	4.1	5.1	6.1	6.2	6.3								
	•	1.3	1.4	2.1	3.1	3.2	3.3	3.4	4.2	5.2	7.1	7.2	7.3	8.1		
C126	▪	1.1	1.2	1.3	1.4	3.1	3.2	3.3	3.4	4.1	4.2	5.1	5.2	6.1	6.2	6.3
	•	1.5	1.6	2.1	2.3	4.3	5.3	6.4	7.1	7.2	7.3	7.4	8.1			

C110	HSS-E PM		N	Z 2		λ 30° γ 12°	DIN 1835B		e8		DIN 327D
C126	HSS-E PM		N	Z 2		λ 30° γ 12°	DIN 1835B	TiCN	e8		DIN 327D

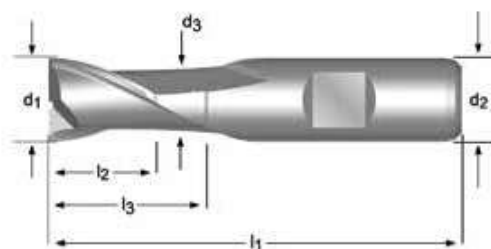

d ₁ Ø Inch	d ₁ Ø mm	d ₂ Ø _{h8} mm	l ₂ mm	l ₁ mm	z	l ₃ mm	d ₃ Ø mm	C110	C126
1/16	1.00	6	2.5	47	2	-	-	C1101.0	C1261.0
	1.50	6	3	47	2	-	-	C1101.5	C1261.5
	1.59	6	3	47	2	-	-	C1101/16	
	1.80	6	4	48	2	-	-	C1101.8	
3/32	2.00	6	4	48	2	-	-	C1102.0	C1262.0
	2.38	6	5	49	2	-	-	C1103/32	
	2.50	6	5	49	2	-	-	C1102.5	C1262.5
	2.80	6	5	49	2	-	-	C1102.8	
1/8	3.00	6	5	49	2	-	-	C1103.0	C1263.0
	3.18	6	6	50	2	-	-	C1101/8	
	3.50	6	6	50	2	-	-	C1103.5	C1263.5
	3.80	6	7	51	2	-	-	C1103.8	
3/16	4.00	6	7	51	2	-	-	C1104.0	C1264.0
	4.50	6	7	51	2	-	-	C1104.5	C1264.5
	4.76	6	8	52	2	-	-	C1103/16	
	4.80	6	8	52	2	-	-	C1104.8	¹⁾²⁾
1/4	5.00	6	8	52	2	-	-	C1105.0	C1265.0
	5.50	6	8	52	2	-	-	C1105.5	C1265.5
	5.75	6	8	52	2	-	-	C1105.75	¹⁾²⁾
	6.00	6	8	52	2	-	-	C1106.0	C1266.0
	6.35	10	10	60	2	-	-	C1101/4	
	6.50	10	10	60	2	-	-	C1106.5	C1266.5
	6.75	10	10	60	2	-	-	C1106.75	
	7.00	10	10	60	2	-	-	C1107.0	C1267.0
5/16	7.50	10	10	60	2	-	-	C1107.5	C1267.5
	7.75	10	11	61	2	-	-	C1107.75	¹⁾²⁾
	7.94	10	11	61	2	-	-	C1105/16	
	8.00	10	11	61	2	-	-	C1108.0	C1268.0

¹⁾ Tolleranza sul diametro h10 / Durchmesser-Toleranz h10 / Diameter tolerantie h10 / tolérance sur le diamètre h10

²⁾ ≠ tolleranza P9 / ≠ P9 Toleranz / ≠ P9 tolerantie / ≠ P9 tolérance