



POLIGONALE

CHIAVI POLIGONALI BRUNITE A PERCUSSIONE CURVE

FEARMEC articolo	mm	L mm	
OSWM-24	24	300	1
OSWM-27	27	300	1
OSWM-30	30	300	1
OSWM-32	32	300	1
OSWM-36	36	300	1
OSWM-38	38	315	1
OSWM-40	40	315	1
OSWM-41	41	315	1
OSWM-46	46	315	1
OSWM-50	50	380	1
OSWM-55	55	380	1
OSWM-60	60	400	1
OSWM-65	65	400	1
OSWM-70	70	400	1
OSWM-75	75	400	1
OSWM-80	80	450	1
OSWM-85	85	450	1
OSWM-90	90	450	1
OSWM-95	95	450	1
OSWM-100	100	500	1
OSWM-105	105	500	1
OSWM-110	110	500	1
OSWM-115	115	500	1


POLLICI



POLIGONALE

CHIAVI POLIGONALI BRUNITE A PERCUSSIONE CURVE

FEARMEC articolo	pollici	L mm	
OSWA-15/16"	15/16"	300	1
OSWA-1"	1"	300	1
OSWA-1-1/8"	1-1/8"	300	1
OSWA-1-1/4"	1-1/4"	300	1
OSWA-1-5/16"	1-5/16"	300	1
OSWA-1-3/8"	1-3/8"	300	1
OSWA-1-7/16"	1-7/16"	300	1
OSWA-1-1/2"	1-1/2"	315	1
OSWA-1-9/16"	1-9/16"	315	1
OSWA-1-5/8"	1-5/8"	315	1
OSWA-1-11/16"	1-11/16"	315	1
OSWA-1-3/4"	1-3/4"	315	1
OSWA-1-13/16"	1-13/16"	315	1
OSWA-1-7/8"	1-7/8"	380	1
OSWA-1-15/16"	1-15/16"	380	1
OSWA-2"	2"	380	1
OSWA-2-1/16"	2-1/16"	380	1
OSWA-2-1/8"	2-1/8"	380	1
OSWA-2-3/16"	2-3/16"	380	1
OSWA-2-1/4"	2-1/4"	405	1
OSWA-2-3/4"	2-3/4"	406	1
OSWA-2-7/8"	2-7/8"	406	1

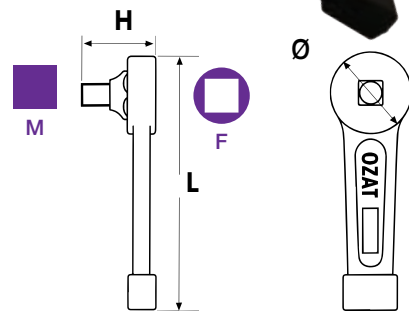

F	M
1/2"	1/2"
1/2"	3/4"
3/4"	3/4"
1"	1"
1"-1/2"	1"-1/2"

CHIAVE A PERCUSSIONE DOPPIO QUADRO MASCHIO 1" - FEMMINA 1"

FEARMEC articolo	F	M	H mm	Ø mm	L mm
FSP 0808	1/2"	1/2"	40	60	190
FSP 0812	1/2"	3/4"	60	66	215
FSP 1212	3/4"	3/4"	60	66	215
FSP 1616	1"	1"	76	86	270
FSP 2424	1"-1/2"	1"-1/2"	100	102	300

CARATTERISTICHE

- con scanalatura e foro per spina nel quadro maschio
- per bussole impact

