


ART. 2005 • 2005/L

SOLLEVATORE ELETTRIDRAULICO A CILINDRI INTERRATI DOTATO DI BRACCI REGOLABILI

Electrohydraulic 2-ram inground lift equipped
with adjustable arms

Elévateur encastré à 2 vérins électrohydraulique
à bras réglables

Elektrohydraulische Unterflur Stempelbühne
mit 4-2-Fach Teleskop-Hebearmen

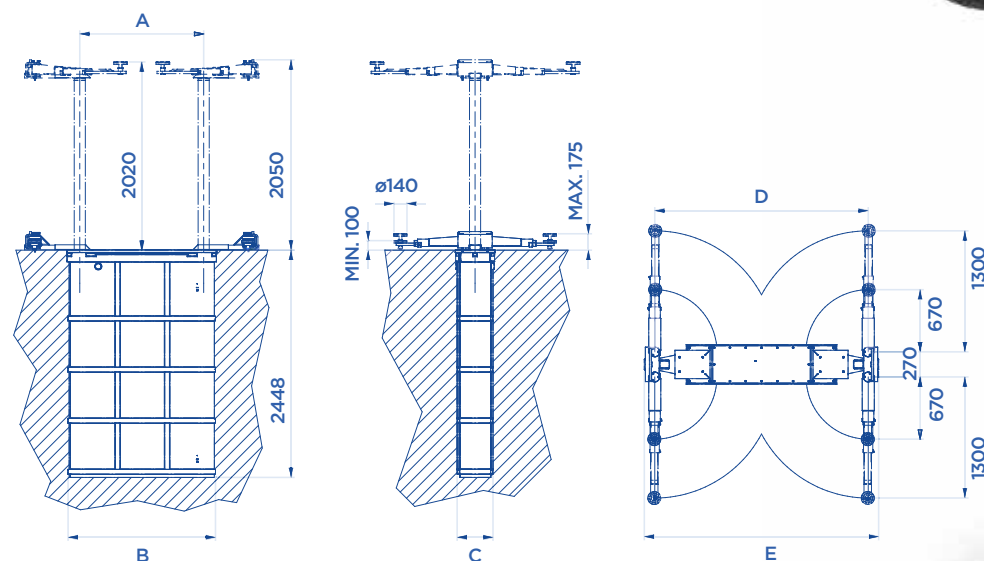

ART.			Motore trifase Three-phase motor Moteur triphasé Netzspannung	A	B	C	D	E	
2005	3500 Kg	3 KW	400V • 50HZ	1335	1588	386	2300	2525	1140
2005/L	3500 Kg	3 KW	400V • 50HZ	2285	2538	386	2600	2825	1300

