


Maschi STI (Imbocco forma D)

per filetti riportati

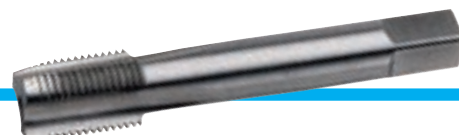

Form D

HSS-G

Diametro Nominale D	B	L 1	L 2	D 2	∅	Articolo
BA						
BA 0	7.1	66.0	19.0	7.1	5.60	03321
BA 2	5.6	66.0	19.0	6.3	5.00	03323
BA 4	4.4	53.0	13.0	4.5	3.55	03325
BA 6	3.4	50.0	13.0	3.55	2.80	03327

BS. Brass

1/4 x 26	7.5	69.0	19.0	8.0	6.30	03341
5/16 x 26	9.1	76.0	20.0	10.0	8.00	03342
3/8 x 26	10.7	82.0	22.0	8.0	6.30	03343
7/16 x 26	12.3	84.0	24.0	9.0	7.10	03344
1/2 x 26	13.9	90.0	25.0	11.2	9.00	03345

Maschi STI V-COIL rapid

per filetti riportati ISO 2 (6H)

Attacco 1/4"



Passo Metrico

Form D

HSS-G

Tolleranza ISO 1 (4H)

M

Diametro Nominale D	B	L 1	L 2	∅	Articolo
M 2.5 x 0.45	3.1	36.0	11.0	1/4"	03090
M 3 x 0.5	3.6	36.0	11.0	1/4"	03091
M 4 x 0.7	4.9	36.0	13.0	1/4"	03092
M 5 x 0.8	6.0	36.0	16.0	1/4"	03093
M 6 x 1.0	7.3	36.0	17.0	1/4"	03094
M 8 x 1.25	9.6	42.0	20.0	1/4"	03095
M 10 x 1.5	11.9	50.0	24.0	1/4"	03096
M 12 x 1.75	14.3	50.0	29.0	1/4"	03097

Punte STI V-COIL rapid

Attacco 1/4"



Diametro Nominale D	L 1	L 2	∅	Articolo
2.6 mm	36.0	16.0	1/4"	03080
3.2 mm	36.0	16.0	1/4"	03081
4.2 mm	36.0	16.0	1/4"	03082
5.2 mm	46.0	26.0	1/4"	03083
6.3 mm	46.0	26.0	1/4"	03084
8.3 mm	46.0	26.0	1/4"	03085
10.4 mm	50.0	33.5	1/4"	03086
12.4 mm	50.0	33.5	1/4"	03087

