

## E260 E261

- M Maschi a macchina Scanalature elicoidali 45°, Red Shark, rastremazione posteriore del filetto
- M Maschinen-Gewindebohrer, rechtsgedrahte Nuten 45°, Rotring Shark, abgefacht
- M Machinetap, spiraalgroeven 45°, Roodring Shark, achter geslepen
- M Tarauds machine goujures hélicoidales 45°, Shark bague rouge, conicité arrière

Fornito in HSS-E fino a nuovo stoc


Lieferung in HSS-E bis neuer Lagerbestand verfügbar ist

Geleverd in HSS-E tot de nieuwe voorraad beschikbaar is

Fourni en HSS-E jusqu'à ce que le nouveau stock soit disponible

E260	▪ 1.4
	• 1.5 1.6 4.2 5.2
E261	▪ 1.4 1.5
	• 1.6 4.2 5.2

E260	M	DIN 371≤10 376≥12	6H		2.5XD	HSS-E PM	C 2-3	λ45°			
E261	M	DIN 371≤10 376≥12	6H		2.5XD	HSS-E PM	C 2-3	λ45°		TiAIN Top	

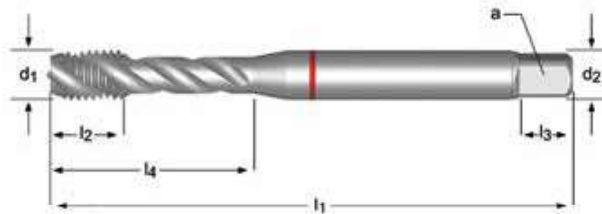

M	P mm	l <sub>1</sub> mm	l <sub>2</sub> mm	d <sub>2</sub> ∅ mm	a mm	l <sub>3</sub> mm	z		l <sub>4</sub> mm	E260	E261
3	0.50	56	6	3.5	2.7	6	3	2.5	18	E260M3	E261M3
4	0.70	63	7	4.5	3.4	6	3	3.3	21	E260M4	E261M4
5	0.80	70	8	6.0	4.9	8	3	4.2	25	E260M5	E261M5
6	1.00	80	10	6.0	4.9	8	3	5.0	30	E260M6	E261M6
8	1.25	90	12	8.0	6.2	9	3	6.8	35	E260M8	E261M8
10	1.50	100	15	10.0	8.0	11	3	8.5	39	E260M10	E261M10
12	1.75	110	16	9.0	7.0	10	3	10.3	-	E260M12	E261M12
14	2.00	110	20	11.0	9.0	12	3	12.0	-	E260M14	-
16	2.00	110	20	12.0	9.0	12	4	14.0	-	E260M16	E261M16
20	2.50	140	25	16.0	12.0	15	4	17.5	-	E260M20	E261M20