


- Frese
- Schaffräser
- Vingerfrees
- Fraises de finition

C122 ■ 1.1 1.2 5.1 6.1 6.2 6.3
 • 1.3 1.4 2.1 3.1 3.2 3.3 3.4 4.1 4.2 5.2 7.1 7.2 7.3 8.1

C122 HSS-E N Z 2 λ 30° γ 12° DIN 1835A e8

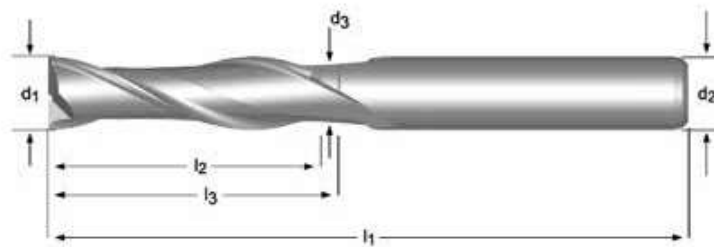

| d_1 Ø mm | d_2 Ø _{h6} mm | l_2 mm | l_1 mm | z | l_3 mm | d_3 Ø mm | C122 |
|------------------|--------------------------------|-------------|-------------|---|-------------|------------------|----------|
| 5.00 | 5 | 22 | 65 | 2 | - | - | C1225.0 |
| 6.00 | 6 | 27 | 75 | 2 | - | - | C1226.0 |
| 7.00 | 8 | 33 | 85 | 2 | - | - | C1227.0 |
| 8.00 | 8 | 33 | 85 | 2 | - | - | C1228.0 |
| 10.00 | 10 | 40 | 95 | 2 | - | - | C12210.0 |
| 12.00 | 12 | 45 | 110 | 2 | - | - | C12212.0 |
| 14.00 | 12 | 52 | 125 | 2 | - | - | C12214.0 |
| 16.00 | 16 | 58 | 140 | 2 | 69.5 | 15.5 | C12216.0 |
| 18.00 | 16 | 65 | 150 | 2 | 76.5 | 15.5 | C12218.0 |
| 20.00 | 20 | 70 | 160 | 2 | 85.5 | 19.5 | C12220.0 |
| 22.00 | 20 | 75 | 170 | 2 | 90.5 | 19.5 | C12222.0 |
| 25.00 | 25 | 82 | 185 | 2 | 101.5 | 24.5 | C12225.0 |
| 30.00 | 25 | 90 | 205 | 2 | 109.5 | 24.5 | C12230.0 |